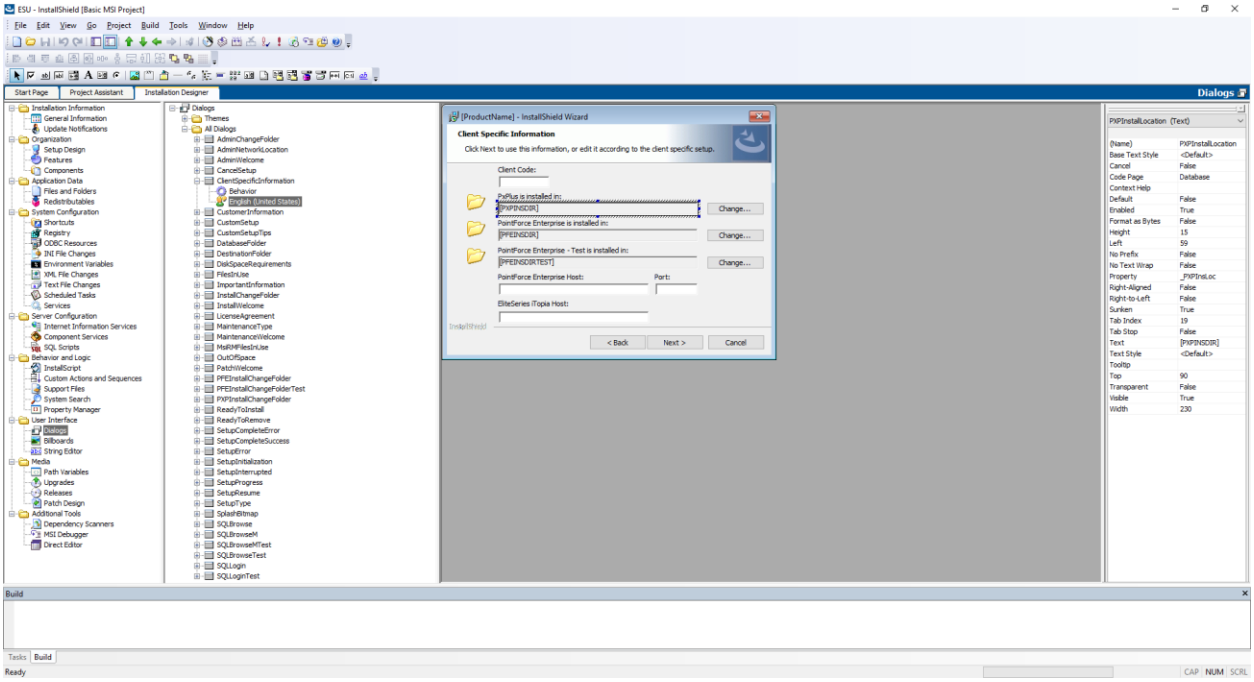
ESU - InstallShield [Basic MSI Project]
File Edit View Go Project Build Tools Window Help
Start Page
Project Assistant
Installation Designer
Dialogs
Installation Information
General Information
Update Notifications
Organization
Setup Design
Features
Components
Application Data
Files and Folders
Redistributables
System Configuration
Shortcuts
Registry
ODBC Resources
INI File Changes
Environment Variables
XML File Changes
Text File Changes
Scheduled Tasks
Services
Server Configuration
Internet Information Services
Component Services
SQL Scripts
Behavior and Logic
InstallScript
Custom Actions and Sequences
Support Files
System Search
Property Manager
User Interface
Dialogs
Billboards
String Editor
Media
Path Variables
Upgrades
Releases
Patch Design
Additional Tools
Dependency Scanners
MSI Debugger
Direct Editor
Dialogs
Themes
All Dialogs
AdminChangeFolder
AdminNetworkLocation
AdminWelcome
CancelSetup
ClientSpecificInformation
Behavior
English (United States)
CustomerInformation
CustomSetup
CustomSetupTips
DatabaseFolder
DestinationFolder
DiskSpaceRequirements
FilesInUse
ImportantInformation
InstallChangeFolder
InstallWelcome
LicenseAgreement
MaintenanceType
MaintenanceWelcome
MsiRMFilesInUse
OutOfSpace
PatchWelcome
PPEInstallChangeFolder
PPEInstallChangeFolderTest
PXPInstallChangeFolder
ReadyToInstall
ReadyToRemove
SetupCompleteError
SetupCompleteSuccess
SetupError
SetupInitialization
SetupInterrupted
SetupProgress
SetupResume
SetupType
SplashBitmap
SQLBrowse
SQLBrowseM
SQLBrowseMTest
SQLBrowseTest
SQLLogin
SQLLoginTest
[ProductName] - InstallShield Wizard
Client Specific Information
Click Next to use this information, or edit it according to the client specific setup.
Client Code:
PxPlus is installed in:
[PXPINSDIR]
Change...
PointForce Enterprise is installed in:
[PPEINSDIR]
Change...
PointForce Enterprise - Test is installed in:
[PPEINSDIRTEST]
Change...
PointForce Enterprise Host:
Port:
EliteSeries iTopia Host:
InstallShield
< Back
Next >
Cancel
PXPInstallLocation (Text)
(Name) PXPInstallLocation
Base Text Style <Default>
Cancel False
Code Page Database
Context Help
Default False
Enabled True
Format as Bytes False
Height 15
Left 59
No Prefix False
No Text Wrap False
Property _PXPInsLoc
Right-Aligned False
Right-to-Left False
Sunken True
Tab Index 19
Tab Stop False
Text [PXPINSDIR]
Text Style <Default>
Tooltip
Top 90
Transparent False
Visible True
Width 230
Build
Tasks
Build
Ready
CAP NUM SCRL

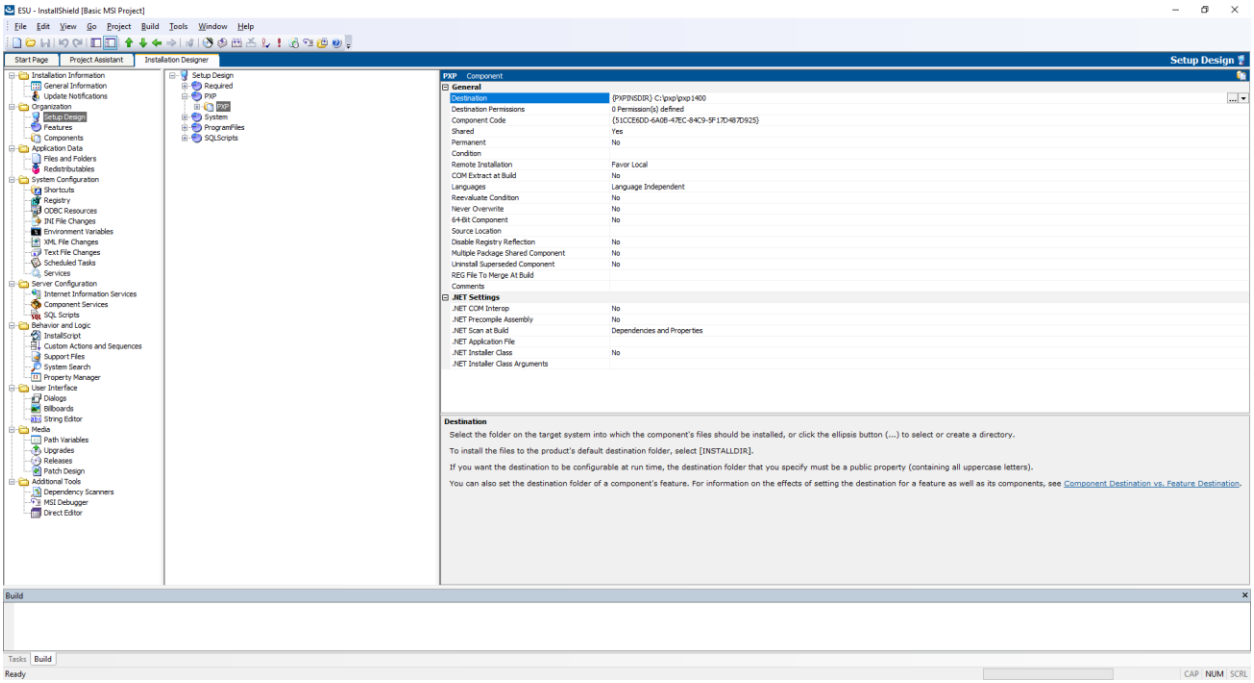
ESU - InstallShield [Basic MSI Project]
File Edit View Go Project Build Tools Window Help
Start Page
Project Assistant
Installation Designer
Setup Design
Installation Information
General Information
Update Notifications
Organization
Setup Design
Features
Components
Application Data
Files and Folders
Redistributables
System Configuration
Shortcuts
Registry
ODBC Resources
INI File Changes
Environment Variables
XML File Changes
Text File Changes
Scheduled Tasks
Services
Server Configuration
Internet Information Services
Component Services
SQL Scripts
Behavior and Logic
InstallScript
Custom Actions and Sequences
Support Files
System Search
Property Manager
User Interface
Dialogs
Billboards
String Editor
Media
Path Variables
Upgrades
Releases
Patch Design
Additional Tools
Dependency Scanners
MSI Debugger
Direct Editor
Setup Design
Required
PXP
PXP
System
ProgramFiles
SQLScripts
PXP Component
General
Destination {PXPINSDIR} C:\pxp\pxp1400
Destination Permissions 0 Permission(s) defined
Component Code {51CCE6DD-6A0B-47EC-84C9-5F17D487D925}
Shared Yes
Permanent No
Condition
Remote Installation Favor Local
COM Extract at Build No
Languages Language Independent
Reevaluate Condition No
Never Overwrite No
64-Bit Component No
Source Location
Disable Registry Reflection No
Multiple Package Shared Component No
Uninstall Superseded Component No
REG File To Merge At Build
Comments
.NET Settings
.NET COM Interop No
.NET Precompile Assembly No
.NET Scan at Build Dependencies and Properties
.NET Application File
.NET Installer Class No
.NET Installer Class Arguments
Destination
Select the folder on the target system into which the component's files should be installed, or click the ellipsis button (...) to select or create a directory.
To install the files to the product's default destination folder, select [INSTALLDIR].
If you want the destination to be configurable at run time, the destination folder that you specify must be a public property (containing all uppercase letters).
You can also set the destination folder of a component's feature. For information on the effects of setting the destination for a feature as well as its components, see Component Destination vs. Feature Destination.
Build
Tasks
Build
Ready
CAP NUM SCRL